


### 3 Rubber Sheetting

## 03B11... WHITE FOOD GRADE SHEETING Polymer SBR

#### Use

**Conforms to F.D.A. 177.2600** and can be used in contact with dry food substances such as flour, cereals, legumes, bread, pasta, etc. It complies with the Italian Ministerial Decree 174 of 6/4/2004. It is not suitable for contact with oily or greasy substances. Specifically recommended when you require aesthetically clean surfaces as this rubber does not stain. Food safety certificate is available.

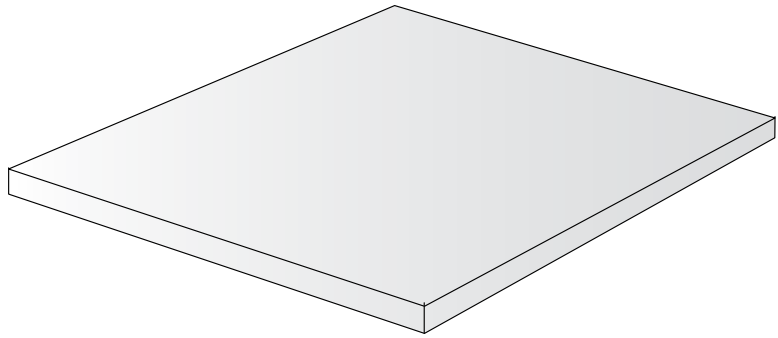

**Color:** White

**Surface:** smooth/smooth

#### Work Temperature:

Min. 25°C Max 80°C

#### GENERAL CHARACTERISTICS

| Elasticity | Compression | Abrasion | Flame | Fuels | Ozone  |
|------------|-------------|----------|-------|-------|--------|
| Good       | Good        | Normal   | Few   | Few   | Normal |

| CHARACTERISTICS | UNIT OF MEASUREMENT | VALUE | TOLERANCE |
|-----------------|---------------------|-------|-----------|
| Hardness (H)    | ShA                 | 60    | +/-5      |
| Elongation      | %                   | 400   | -         |
| Specific weight | g/cm <sup>3</sup>   | 1,5   | -         |

| THICKNESS mm  | HEIGHT mt | LENGTH mt |
|---------------|-----------|-----------|
| 1             | 1,4       | 10        |
| 1,5           | 1,4       | 10        |
| from 2 at 2,5 | 1,4       | 10        |
| from 3 at 10  | 1,4       | 10        |
| from 12 at 20 | 1,4       | 5         |
| from 25 at 50 | 1         | 1         |