


3 Rubber Sheeting

03BBQ.. NEOPRENE SUPER RUBBER SHEET Polymer CR

Use

Self-extinguishing and partially flame resistant. Excellent resistance to ozone, weathering and ageing. Good resistance to both mineral and vegetable oils. Fair resistance to sea water and abrasion. Also has a good resistance to low concentration solvents and acids. Suitable for differing uses with similar requirements.

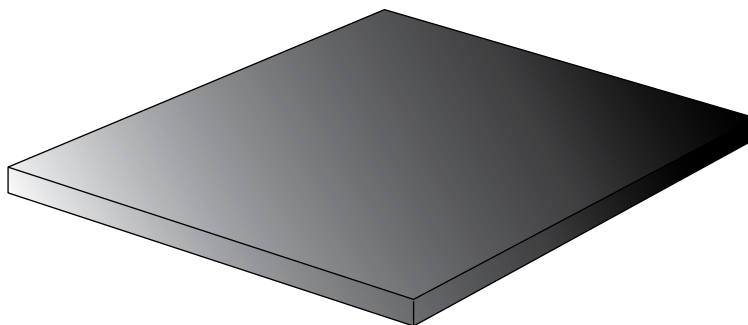

Color: Black

Surface: smooth/smooth

Work Temperature:

Min. -20° Max 90°

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Good	Good	Few	Excellent	Moderate	Good

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	60	± 5
Elongation	%	400	
Specific weight	g/cm ³	1,42	

THICKNESS mm	HEIGHT mt	LENGTH mt
1	1,2 / 1,5	10
1,5	1,2 / 1,5	10
2/2,5	1,2 / 1,5	10
from 3 at 10	1,2 / 1,5	10
from 12 at 20	1 / 1,2	5
from 25 at 50	1	1