


3 Rubber Sheeting

03BBXT.. NITRILE SUPER SH70 SHEET WITH TEXTILE INSERT Polymer NBR

Use

Excellent resistance to oils, mineral and animal fats, excellent resistance to temperature and ageing. Good mechanical properties, low permanent deformation and low gas permeability. Gloss surface with textile inserts.

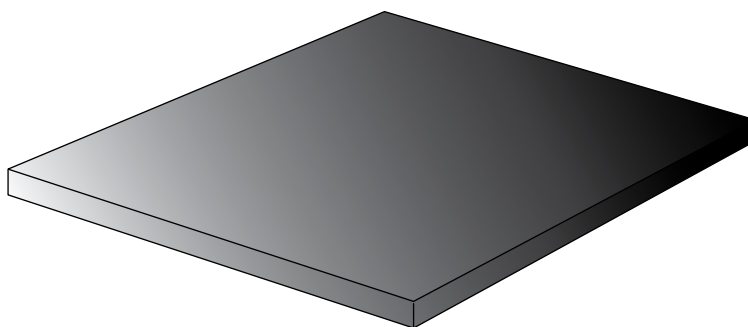

Color: Black

Surface: smooth/smooth

Work Temperature:

Min. -20° Max 100°

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Moderate	Good	Few	Few	Good	Normal

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	70	± 5
Elongation	%	350	
Specific weight	g/cm ³	1,50	

THICKNESS mm	HEIGHT mt	LENGTH mt
from 1 at 10	1,5	10