


3 Rubber Sheeting

03EPR..T EPDM RUBBER SHEET Polymer EPDM

Use with textile insert

Equipped with good physical and mechanical properties, good resistance to heat, weathering, ageing and sea water, it is used mainly outdoors where a good resistance to ozone and temperature changes is required. Suitable for contact with low and medium concentration acids and solvents. Suitable for differing uses with similar requirements. With textile insert.

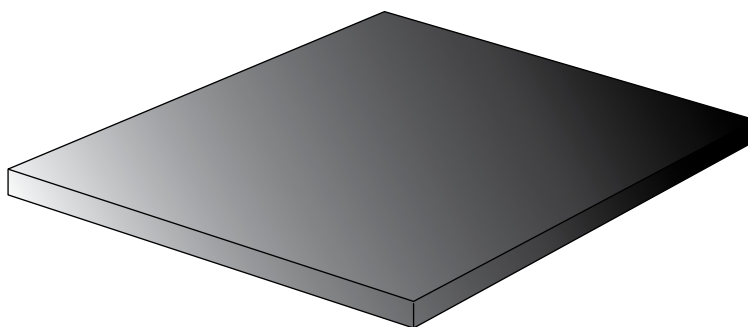

Color: Black

Surface: smooth/smooth

Work Temperature:

Min. -20° Max 80°

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Normal	Moderate	Few	Few	Not suitable	Good

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	70	± 5
Elongation	%	250	
Specific weight	g/cm ³	1,33	

THICKNESS mm	HEIGHT mt	LENGTH mt
1	1,2 / 1,5	10
1,5	1,2 / 1,5	10
2/2,5	1,2 / 1,5	10
from 3 at 10	1,2 / 1,5	10
from 12 at 20	1 / 1,2	5
from 25 at 50	1	1