


3 Rubber Sheeting

03FON.. NR+SBR Rubber Blend Polymer NR/SBR

Use

Commonly used as a vibration damper in prefabs or as protection in sandblasting chambers. Particularly good resistance to abrasion and tearing, it can withstand repeated stress (bending and vibration), moderate physical and mechanical characteristics. Good resistance to atmospheric agents.

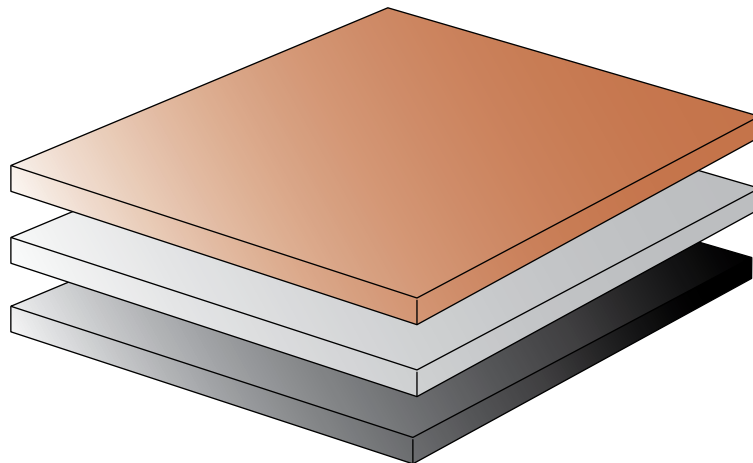

Color: Black

Surface: smooth/smooth

Work Temperature:

Min. -25°C Max 80°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Moderate	Moderate	Moderate	Few	Not suitable	Moderate

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	60	
Elongation	%	600	
Specific weight	g/cm ³	1,30	
Tear Resistance	kg/cm	27	
Abrasion loss (DIN 53516)	mm ³	83	

THICKNESS mm	HEIGHT mt	LENGTH mt
1	1,4	10
1,5	1,4	10
2/2,5	1,4	10
from 3 at 10	1,4	10
from 12 at 20	1,4	5
from 25 at 50	1	1