


3 Rubber Sheeting

03 FUM.. NR RUBBER BLEND Polymer Natural Rubber

Use

Natural rubber has an excellent elastic resilience and also wear resistance as well as to cutting and tearing. Exceptional elongation at breaking point. Has good resistance to seawater and to low concentration acids. Has a low resistance to ageing and weathering is not recommended for heavy duty outdoor applications.

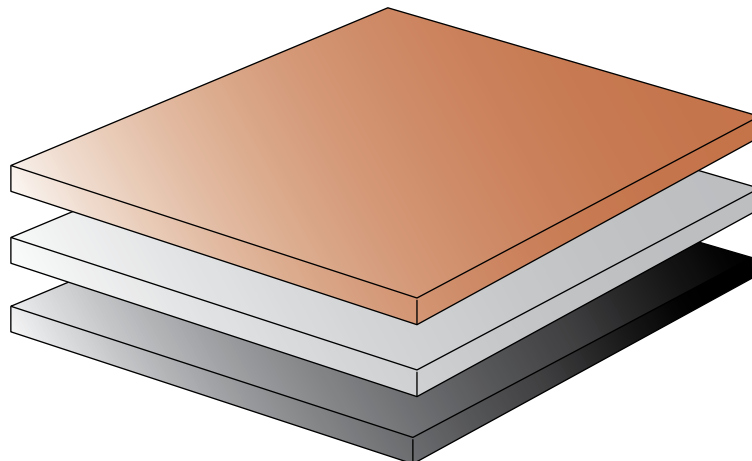

Color: light-brown/beige

Superficie: smooth/smooth

Work Temperature:

Min. -40°C Max 80°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Excellent	Excellent	Very good	Few	Not suitable	Few

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	45	
Elongation	%	600	
Specific weight	g/cm ³	1,04	
Tear resistance	kg/cm	27	
Abrasion loss (DIN 53516)	mm ³	83	

THICKNESS mm	HEIGHT mt	LENGTH mt
1	1,4	10
1,5	1,4	10
2/2,5	1,4	10
from 3 at 10	1,4	10
from 12 at 20	1,4	5
from 25 at 50	1	1