

3 Rubber Sheeting

03IDL.. INDUSTRIAL BLACK RUBBER SHEET Polymer SBR

Use


Suitable for many uses, without the specific characteristics of heat resistance. It has good resistance to weathering and ozone. Is usually cut and used for sealing applications. It is the most commonly used industrial rubber.

Color: Black

Surface: smooth/smooth

Work Temperature:

Min. -20°C Max 70°C

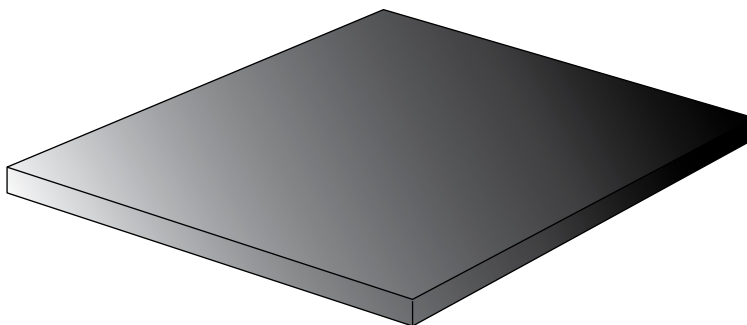

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Few	Normal	Normal	Few	Not suitable	Normal

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	65	± 5
Elongation	%	200	
Specific weight	g/cm ³	1,60	

THICKNESS mm	HEIGHT mt	LENGTH mt
1	1,2/1,4	10
2 / 2,5	1,2/1,4	10
1,5	1,2/1,4	10
from 3 at 10	1,2/1,4	10
from 12 at 25	1,2	5
from 25 at 50	1	1