


3 Rubber Sheeting

03 IDT.. Industrial rubber sheet with 2 side impression

Use

Suitable for many uses, without the specific characteristics of heat resistance. It has good resistance to weathering and ozone. Is usually cut and used for sealing applications. The fabric impression on the surface allows a better grip and helps bonding during the gluing process.

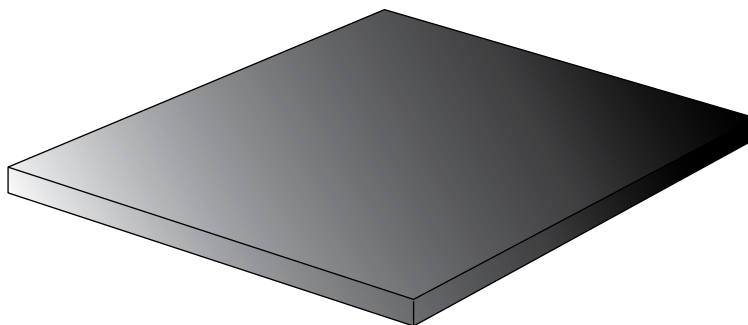

Color: Black

Surface: ply impr. / ply impr.

Work Temperature:

Min. -25°C Max 70°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Few	Normal	Normal	Few	NOT Suitable	Normal

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness (H).	Sh.A	70	± 5
Elongation	%	200	
Specific weight	g/cm ³	1,60	
Tear resistance	kg/cm	14	
Abrasion loss (DIN 53516)	mm ³	300	

THICKNESS mm	HEIGHT mt	LENGTH mt
1,5	1,4	10
2/2,5	1,4	10
from 3 at 10	1,4	10
from 12 at 20	1,4	5
from 25 at 50	1	1