


3 Rubber Sheeting

03SIL..MQ NATURAL SILICONE SHEET Polimer VMQ

Impiego

Particularly suitable where good resistance to high or low temperatures is required. Excellent resistance to UV, weathering, ozone and ageing. Good resistance to solvents, bases and diluted acids, also to oils and animal and vegetable fats. Not recommended for use with mineral oils, fuels or aromatic hydrocarbons, benzene, paraffin and steam. Rubber is odour and stain resistant. Suitable for contact with food according to FDA 21cfr177.260 and EC 1935/2004, EC 2023/2006, EC 1272 (2008) and completely sulphur free.

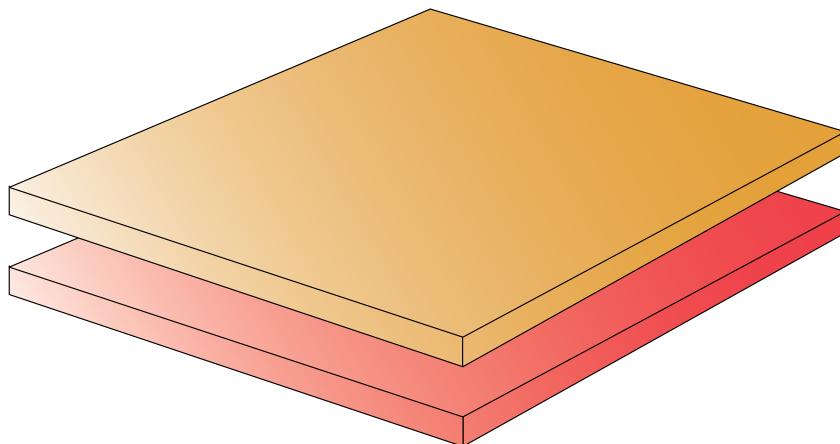

Color: Translucent

Surface: smooth/smooth

Work Temperature:

Min. -60°C Max 220°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Good	Good	Not suitable	Few	Few	Very Good

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	55	± 5
Elongation	%	300	
Specific weight	g/cm ³	1,20	

THICKNESS mm	HEIGHT mt	LENGTH mt
from 1 at 6	1,00	2,00
from 8 a 10	1,00	1,00