


3 Rubber Sheeting

03STR.. NATURAL SILICONE SHEET

Use

Particularly suitable where excellent resistance to high or low temperatures is required. Excellent resistance to UV, weathering, ozone and ageing. Good resistance to solvents, bases and dilute acids, oils and animal and vegetable fats. Not recommended for use with mineral oils, fuels and aromatic hydrocarbons, benzene, paraffin and steam. Rubber is odour and stain resistant. Suitable for contact with food according to FDA 21CFR177.2600 + EC1935/2004.

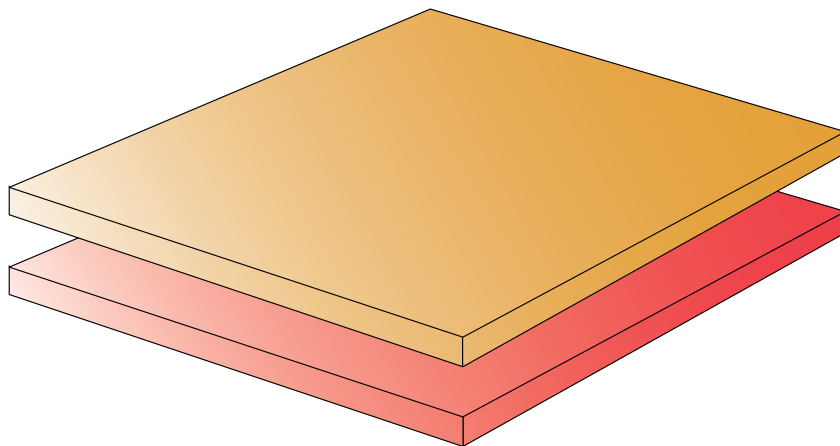

Color: Translucent

Superficie: smooth/smooth

Work Temperature:

Min. -60°C Max 200°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Good	Good	Moderate	Few	Few	Very Good

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	60	± 5
Elongation	%	350	
Specific weight	g/cm ³	1,15	

THICKNESS mm	HEIGHT mt	LENGTH mt
from 1 at 10	1,20	10
15	1,20	5