


3 Rubber Sheeting

03 TXL.. INDUSTRIAL RUBBER SHEET WITH PLY Polimer SBR

Use

Rubber with textile inserts suitable for a wide range of applications, where heat resistance is not required. It has good resistance to weathering and ozone. Is usually cut and used as industrial seals. It is most commonly used industrial rubber. One or two textile inserts according to the thickness.

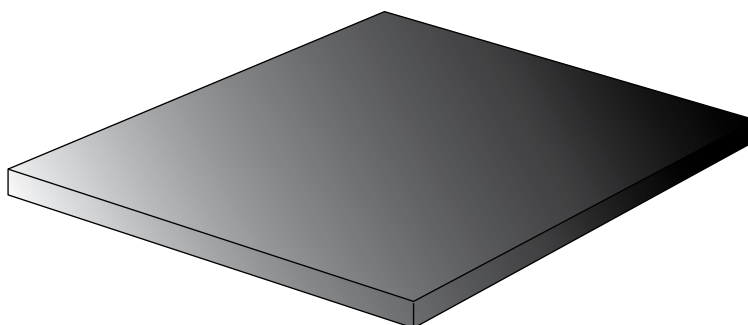

Color: Black

Surface: smooth/smooth

Work Temperature:

Min. -25°C Max 70°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Few	Normal	Normal	Few	Not suitable	Normal

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	70	± 5
Elongation	%	200	
Specific weight	g/cm ³	1,60	

THICKNESS mm	PLY'S LAYER Nr.	HEIGHT mt	LENGHT mt
1,5	1	1,2/1,4	10
2 e 2,5	1	1,2/1,4	10
3 e 4	1	1,2/1,4	10
from 4 at 10	2	1,2/1,4	10
from 12 at 20	2	1,2	5
from 25 at 50	2	1	1