


3 Rubber Sheeting

03TXT..

INDUSTRIAL RUBBER SHEET WITH PLY AND SIDE IMPRESSION Polymer SBR

Use

Suitable for a wide range of uses, where heat resistance is not required. It has good resistance to weathering and ozone. Is usually cut and used as industrial seals. The cloth impression on the surface allows better adhesion and helps with glueing. One or two textile inserts according to the thickness.

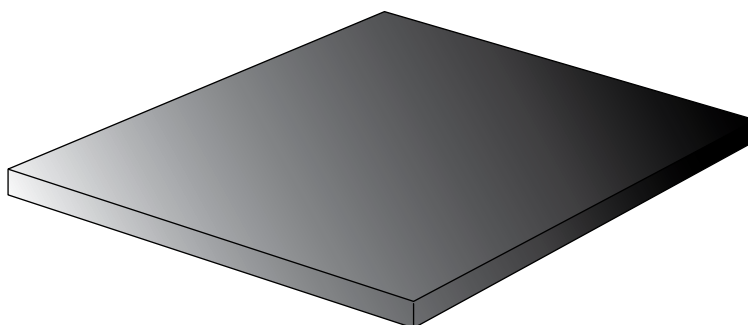

Color: Black

Surface: ply impr./ply impr.

Work Temperature:

Min. -25°C Max 70°C

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Few	Normal	Normal	Few	Not suitable	Normal

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	70	± 5
Elongation	%	200	
Specific weight	g/cm³	1,60	

THICKNESS mm	PLY'S LAYER Nr.	HEIGHT mt	LENGTH mt
1,5	1	1,2/1,4	10
2 e 2,5	1	1,2/1,4	10
3 e 4	1	1,2/1,4	10
from 4 at 10	2	1,2/1,4	10
from 12 at 20	2	1,2	5
from 25 t 50	2	1	1