

3 Rubber Sheeting

03VIT.. FKM (VITON) SHEET Polymer FKM

Use


It is the most valuable rubber. Particularly suitable for the fuel, chemical and pharmaceutical industries. Excellent resistance to hydrocarbons, solvents and many high concentration chemicals. Also good resistance to weathering, ozone, ageing and temperature changes.

Color: Black

Surface: smooth/smooth

Work Temperature:

-10°C Max 200°C

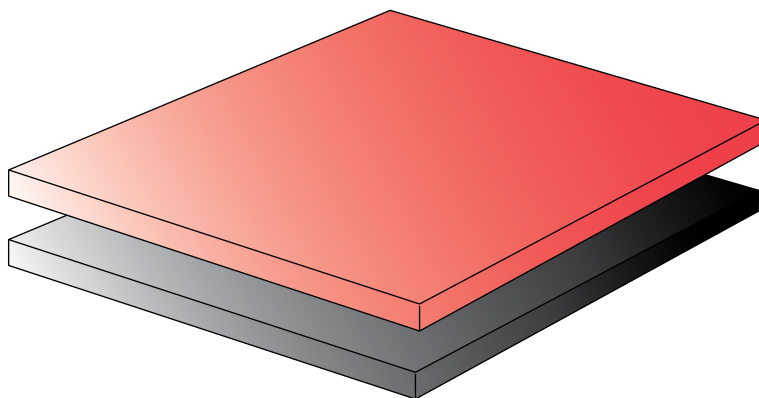

GENERAL CHARACTERISTICS

Elasticity	Compression	Abrasion	Flame	Fuels	Ozone
Moderate	Excellent	Few	Excellent	Excellent	Excellent

CHARACTERISTICS	UNIT OF MEASUREMENT	VALUE	TOLERANCE
Hardness	Sh.A	75	± 5
Elongation	%	270	
Specific weight	g/cm³	1,90	

THICKNESS mm	HEIGHT mt	LENGTH mt
1	1,2 / 1,5	10
1,5	1,2 / 1,5	10
2/2,5	1,2 / 1,5	10
from 3 at 10	1,2 / 1,5	10
from 12 at 20	1 / 1,2	5
from 25 at 50	1	1