

Supports with integrated hydraulic damping

HYDROMOUNTS K SERIES



Properties

- anti-vibration mount with integrated hydraulic damping
- high lateral rigidity and hydraulic damping on the vertical axis
- especially well suited for the suspension of heavy equipment in control cabins on construction or agricultural machines
- also suitable to be assembled as mounts of large motors
- suitable for power units and equipment with continuous and periodic excitation forces
- provide exceptionally good damping characteristics
- load, refers to maximum capacity of use: from 100 up to 350 kg
- also available, in same dimension, without hydraulic damping

Applications

- elastic suspension solutions at the highest technical level in all areas of machine, engine and industrial vehicle manufacturing






Code - 9AC2HYDK....

Material - Rubber/Metal

Hardness - 40 ÷ 65 ° shore A

Hydromounts K 2000

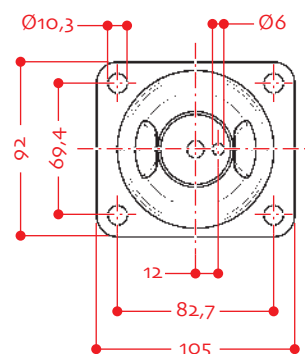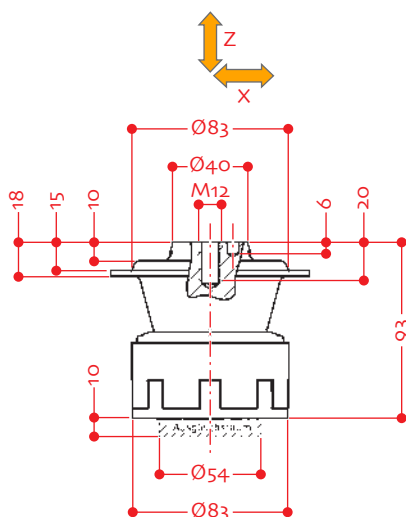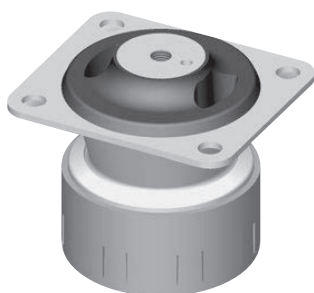




continued on next page

Supports with integrated hydraulic damping




HYDROMOUNTS K SERIES



Hydromounts K 3500 LT

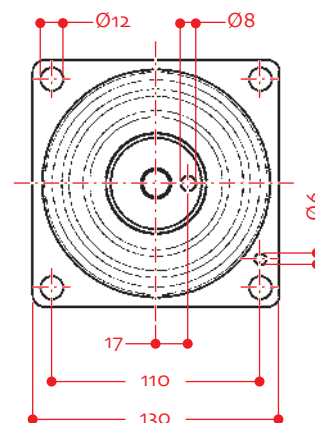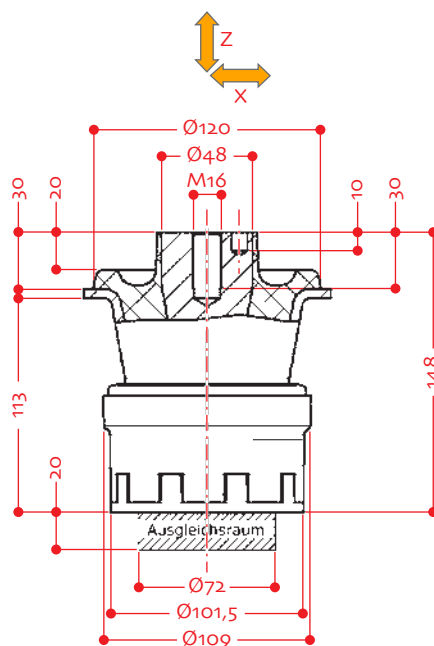

Hydromounts K 3500

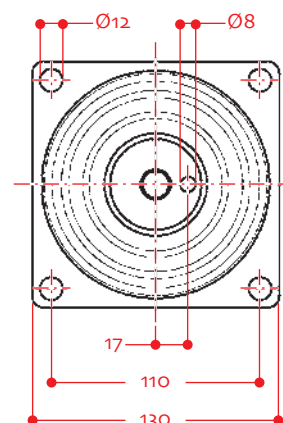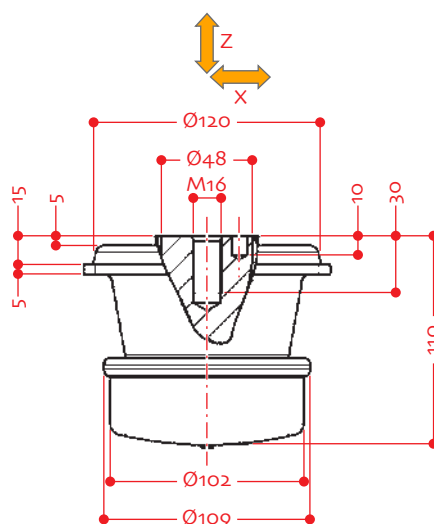

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - mar_19 rbd