

# PLASTIC BASE FEET WITH 30° ADJUSTABLE BOLT

## Properties

- adjustable feet with pivoted iron bolt for industrial machinery and floating flooring
- base is made of polyamide reinforced with glass fiber and has an substrate NBR rubber 70 shore with the function of anti-slip
- NBR rubber allows the use in workshops and in any are where there are traces of oil
- rubber substrate only has non-slip function and does not guarantee the absorption of vibration
- for diameters greater than Ø 83 is provided for the possibility of anchoring to the floor

## Applications

- support for industrial machinery and floating flooring

The load values mentioned in the table are calculated in static conditions using half of the threaded length of the support shaft. In case of intended use in the presence of a vibrating or moving load, such values will have to be adequately reduced. For ultimate clarification consult with our technical department.

NB: the same feet are also available upon request **TOTALLY in Stainless Steel** for sanitary, foodstuff and pharmaceutical applications.




**Code - 9APM....**

**Material - Nylon FV/NBR/Metal**

**Hardness - 70 °shore A**

## Dimensional and load data for DIAMETER plate D from Ø 40 up to Ø 65


| Description | Dimension |     |      |      |      |     |                | Static Load |
|-------------|-----------|-----|------|------|------|-----|----------------|-------------|
|             | A         | B   | Ø D  | F    | G    | H   | H <sub>1</sub> |             |
|             |           | mm  | mm   |      | mm   | mm  | mm             | daN         |
| M 8         | 27        | 25  | Ø 40 | M 8  | 16,5 | 52  | 55             | 1000        |
| M 8         | 27        | 50  | Ø 40 | M 8  | 16,5 | 77  | 80             | 1000        |
| M 8         | 27        | 75  | Ø 40 | M 8  | 16,5 | 102 | 105            | 1000        |
| M 8         | 27        | 100 | Ø 40 | M 8  | 16,5 | 127 | 130            | 1000        |
| M 12        | 27        | 25  | Ø 40 | M 12 | 16,5 | 52  | 55             | 1000        |
| M 12        | 27        | 50  | Ø 40 | M 12 | 16,5 | 77  | 80             | 1000        |
| M 12        | 27        | 75  | Ø 40 | M 12 | 16,5 | 102 | 105            | 1000        |
| M 12        | 27        | 100 | Ø 40 | M 12 | 16,5 | 127 | 130            | 1000        |
| M 12        | 27        | 125 | Ø 40 | M 12 | 16,5 | 152 | 155            | 1000        |
| M 10        | 30        | 25  | Ø 50 | M 10 | 20   | 55  | 58             | 1100        |
| M 10        | 30        | 50  | Ø 50 | M 10 | 20   | 80  | 83             | 1100        |
| M 10        | 30        | 75  | Ø 50 | M 10 | 20   | 105 | 108            | 1100        |
| M 10        | 30        | 100 | Ø 50 | M 10 | 20   | 130 | 133            | 1100        |
| M 10        | 30        | 125 | Ø 50 | M 10 | 20   | 155 | 158            | 1100        |
| M 14        | 30        | 25  | Ø 50 | M 14 | 20   | 55  | 58             | 1100        |
| M 14        | 30        | 50  | Ø 50 | M 14 | 20   | 80  | 83             | 1100        |
| M 14        | 30        | 75  | Ø 50 | M 14 | 20   | 105 | 108            | 1100        |
| M 14        | 30        | 100 | Ø 50 | M 14 | 20   | 130 | 133            | 1100        |
| M 14        | 30        | 125 | Ø 50 | M 14 | 20   | 155 | 158            | 1100        |
| M 10        | 33        | 50  | Ø 65 | M 10 | 23   | 83  | 86             | 1100        |
| M 10        | 33        | 75  | Ø 65 | M 10 | 23   | 108 | 111            | 1100        |
| M 10        | 33        | 100 | Ø 65 | M 10 | 23   | 133 | 136            | 1100        |
| M 10        | 33        | 125 | Ø 65 | M 10 | 23   | 158 | 161            | 1100        |

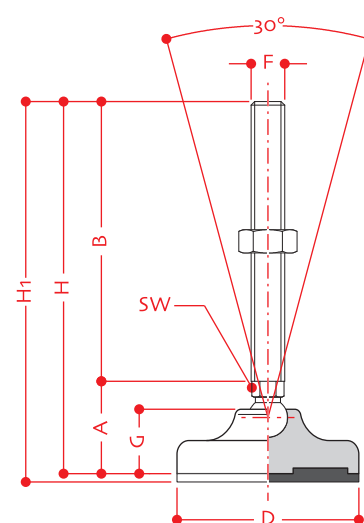

continued on next page


# PLASTIC BASE FEET WITH 30° ADJUSTABLE BOLT

| Description | Dimension |     |      |      |    |     |                | Static Load |
|-------------|-----------|-----|------|------|----|-----|----------------|-------------|
|             | A         | B   | Ø D  | F    | G  | H   | H <sub>1</sub> |             |
|             |           | mm  | mm   |      | mm | mm  | mm             | daN         |
| M 14        | 33        | 50  | Ø 65 | M 14 | 23 | 83  | 86             | 1500        |
| M 14        | 33        | 75  | Ø 65 | M 14 | 23 | 108 | 111            | 1500        |
| M 14        | 33        | 100 | Ø 65 | M 14 | 23 | 133 | 136            | 1500        |
| M 14        | 33        | 125 | Ø 65 | M 14 | 23 | 158 | 161            | 1500        |
| M 14        | 33        | 150 | Ø 65 | M 14 | 23 | 183 | 186            | 1500        |
| M 14        | 33        | 175 | Ø 65 | M 14 | 23 | 208 | 211            | 1500        |
| M 16        | 33        | 50  | Ø 65 | M 16 | 23 | 83  | 86             | 1500        |
| M 16        | 33        | 75  | Ø 65 | M 16 | 23 | 108 | 111            | 1500        |
| M 16        | 33        | 100 | Ø 65 | M 16 | 23 | 133 | 136            | 1500        |
| M 16        | 33        | 125 | Ø 65 | M 16 | 23 | 158 | 161            | 1500        |
| M 16        | 33        | 150 | Ø 65 | M 16 | 23 | 183 | 186            | 1500        |
| M 16        | 33        | 175 | Ø 65 | M 16 | 23 | 208 | 211            | 1500        |
| M 16        | 33        | 200 | Ø 65 | M 16 | 23 | 233 | 236            | 1500        |

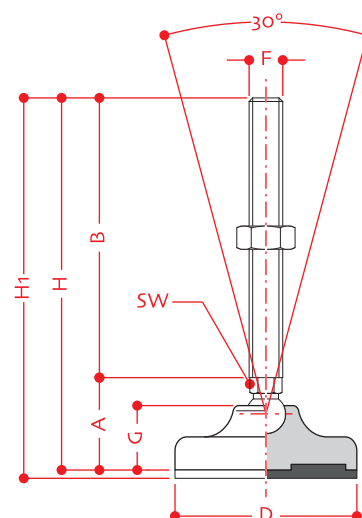

## Dimensional and load data for DIAMETER plate D dal Ø 83 fino al Ø 123

| Description | Dimension |     |       |      |    |     |                | Static Load |
|-------------|-----------|-----|-------|------|----|-----|----------------|-------------|
|             | A         | B   | Ø D   | F    | G  | H   | H <sub>1</sub> |             |
|             |           | mm  | mm    |      | mm | mm  | mm             | daN         |
| M 10        | 38        | 50  | Ø 83  | M 10 | 27 | 88  | 91             | 1500        |
| M 10        | 38        | 75  | Ø 83  | M 10 | 27 | 113 | 116            | 1500        |
| M 10        | 38        | 100 | Ø 83  | M 10 | 27 | 138 | 141            | 1500        |
| M 10        | 38        | 125 | Ø 83  | M 10 | 27 | 163 | 166            | 1500        |
| M 14        | 38        | 50  | Ø 83  | M 14 | 27 | 88  | 91             | 2000        |
| M 14        | 38        | 75  | Ø 83  | M 14 | 27 | 113 | 116            | 2000        |
| M 14        | 38        | 100 | Ø 83  | M 14 | 27 | 138 | 141            | 2000        |
| M 14        | 38        | 125 | Ø 83  | M 14 | 27 | 163 | 166            | 2000        |
| M 14        | 38        | 150 | Ø 83  | M 14 | 27 | 188 | 191            | 2000        |
| M 14        | 38        | 175 | Ø 83  | M 14 | 27 | 213 | 216            | 2000        |
| M 16        | 38        | 50  | Ø 83  | M16  | 27 | 88  | 91             | 2000        |
| M 16        | 38        | 75  | Ø 83  | M16  | 27 | 113 | 116            | 2000        |
| M 16        | 38        | 100 | Ø 83  | M16  | 27 | 138 | 141            | 2000        |
| M 16        | 38        | 125 | Ø 83  | M16  | 27 | 163 | 166            | 2000        |
| M 16        | 38        | 150 | Ø 83  | M16  | 27 | 188 | 191            | 2000        |
| M 16        | 38        | 175 | Ø 83  | M16  | 27 | 213 | 216            | 2000        |
| M 16        | 38        | 200 | Ø 83  | M16  | 27 | 238 | 241            | 2000        |
| M 16        | 51        | 50  | Ø 103 | M 16 | 32 | 101 | 104            | 2500        |
| M 16        | 51        | 75  | Ø 103 | M 16 | 32 | 126 | 129            | 2500        |
| M 16        | 51        | 100 | Ø 103 | M 16 | 32 | 151 | 154            | 2500        |
| M 16        | 51        | 125 | Ø 103 | M 16 | 32 | 176 | 179            | 2500        |
| M 16        | 51        | 150 | Ø 103 | M 16 | 32 | 201 | 204            | 2500        |
| M 16        | 51        | 175 | Ø 103 | M 16 | 32 | 226 | 229            | 2500        |
| M 16        | 51        | 200 | Ø 103 | M 16 | 32 | 251 | 254            | 2500        |
| M 16        | 51        | 225 | Ø 103 | M 16 | 32 | 276 | 279            | 2500        |
| M 20        | 51        | 75  | Ø 103 | M 20 | 32 | 126 | 129            | 2500        |

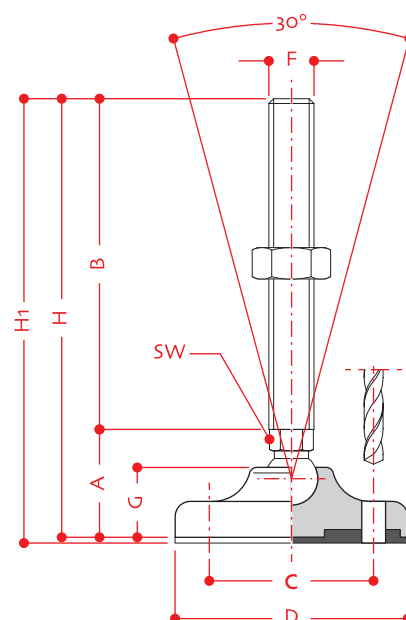


Dimension C: 55 mm for Ø 83  
73 mm for Ø 103  
87 mm for Ø 123

continued on next page

## PLASTIC BASE FEET WITH 30° ADJUSTABLE BOLT

| Description | Dimension |     |       |      |    |     |                | Static Load |
|-------------|-----------|-----|-------|------|----|-----|----------------|-------------|
|             | A         | B   | Ø D   | F    | G  | H   | H <sub>1</sub> |             |
|             |           | mm  | mm    |      | mm | mm  | mm             | daN         |
| M 20        | 51        | 100 | Ø 103 | M 20 | 32 | 151 | 154            | 2500        |
| M 20        | 51        | 125 | Ø 103 | M 20 | 32 | 176 | 179            | 2500        |
| M 20        | 51        | 150 | Ø 103 | M 20 | 32 | 201 | 204            | 2500        |
| M 20        | 51        | 175 | Ø 103 | M 20 | 32 | 226 | 229            | 2500        |
| M 20        | 51        | 200 | Ø 103 | M 20 | 32 | 251 | 254            | 2500        |
| M 20        | 51        | 225 | Ø 103 | M 20 | 32 | 276 | 279            | 2500        |
| M 20        | 51        | 250 | Ø 103 | M 20 | 32 | 301 | 304            | 2500        |
| M 24        | 51        | 75  | Ø 103 | M 24 | 32 | 126 | 129            | 2500        |
| M 24        | 51        | 100 | Ø 103 | M 24 | 32 | 151 | 154            | 2500        |
| M 24        | 51        | 125 | Ø 103 | M 24 | 32 | 176 | 179            | 2500        |
| M 24        | 51        | 150 | Ø 103 | M 24 | 32 | 201 | 204            | 2500        |
| M 24        | 51        | 175 | Ø 103 | M 24 | 32 | 226 | 229            | 2500        |
| M 24        | 51        | 200 | Ø 103 | M 24 | 32 | 251 | 254            | 2500        |
| M 24        | 51        | 225 | Ø 103 | M 24 | 32 | 276 | 279            | 2500        |
| M 24        | 51        | 250 | Ø 103 | M 24 | 32 | 301 | 304            | 2500        |
| M 16        | 57        | 50  | Ø 123 | M 16 | 37 | 107 | 110            | 3500        |
| M 16        | 57        | 75  | Ø 123 | M 16 | 37 | 132 | 135            | 3500        |
| M 16        | 57        | 100 | Ø 123 | M 16 | 37 | 157 | 160            | 3500        |
| M 16        | 57        | 125 | Ø 123 | M 16 | 37 | 182 | 185            | 3500        |
| M 16        | 57        | 150 | Ø 123 | M 16 | 37 | 207 | 210            | 3500        |
| M 16        | 57        | 175 | Ø 123 | M 16 | 37 | 232 | 235            | 3500        |
| M 16        | 57        | 200 | Ø 123 | M 16 | 37 | 257 | 260            | 3500        |
| M 16        | 57        | 225 | Ø 123 | M 16 | 37 | 285 | 288            | 3500        |
| M 20        | 57        | 75  | Ø 123 | M 20 | 37 | 132 | 135            | 3500        |
| M 20        | 57        | 100 | Ø 123 | M 20 | 37 | 157 | 160            | 3500        |
| M 20        | 57        | 125 | Ø 123 | M 20 | 37 | 182 | 185            | 3500        |
| M 20        | 57        | 150 | Ø 123 | M 20 | 37 | 207 | 210            | 3500        |
| M 20        | 57        | 175 | Ø 123 | M 20 | 37 | 232 | 235            | 3500        |
| M 20        | 57        | 200 | Ø 123 | M 20 | 37 | 257 | 260            | 3500        |
| M 20        | 57        | 225 | Ø 123 | M 20 | 37 | 282 | 285            | 3500        |
| M 20        | 57        | 250 | Ø 123 | M 20 | 37 | 307 | 310            | 3500        |
| M 24        | 57        | 75  | Ø 123 | M 24 | 37 | 132 | 135            | 3500        |
| M 24        | 57        | 100 | Ø 123 | M 24 | 37 | 157 | 160            | 3500        |
| M 24        | 57        | 125 | Ø 123 | M 24 | 37 | 182 | 185            | 3500        |
| M 24        | 57        | 150 | Ø 123 | M 24 | 37 | 207 | 210            | 3500        |
| M 24        | 57        | 175 | Ø 123 | M 24 | 37 | 232 | 235            | 3500        |
| M 24        | 57        | 200 | Ø 123 | M 24 | 37 | 257 | 260            | 3500        |
| M 24        | 57        | 225 | Ø 123 | M 24 | 37 | 282 | 285            | 3500        |
| M 24        | 57        | 250 | Ø 123 | M 24 | 37 | 307 | 310            | 3500        |
| M 30        | 58        | 100 | Ø 123 | M 30 | 37 | 158 | 161            | 3500        |
| M 30        | 58        | 125 | Ø 123 | M 30 | 37 | 183 | 186            | 3500        |
| M 30        | 58        | 150 | Ø 123 | M 30 | 37 | 208 | 211            | 3500        |
| M 30        | 58        | 175 | Ø 123 | M 30 | 37 | 233 | 236            | 3500        |
| M 30        | 58        | 200 | Ø 123 | M 30 | 37 | 258 | 261            | 3500        |
| M 30        | 58        | 225 | Ø 123 | M 30 | 37 | 283 | 286            | 3500        |
| M 30        | 58        | 250 | Ø 123 | M 30 | 37 | 308 | 311            | 3500        |

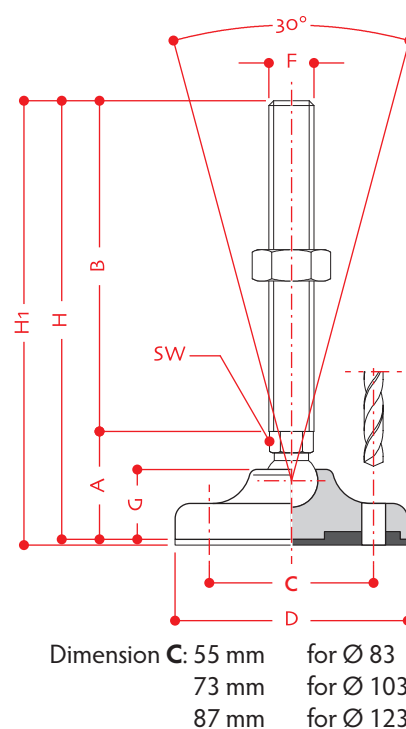

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • apr 19 rdb