



Air/Fumes

A-TUBE CEJN

Properties

- straight braided PUR Hose that easily springs back to its original form
- excellent choice for applications requiring a maximum working pressure up to 16 bar
- light and flexible
- excellent resistance to oil, solvents, and other non-aqueous solutions
- excellent abrasion resistance
- long service life with outstanding aging qualities

Applications

- particularly suitable for conveying low-medium pressure oils and fats


Construction

- PUR, ester-based polyurethane, reinforced with polyester fiber

Table of pressures

- table of pressures values expressed as a % in relation to operating temperature

20°	30°	40°	50°	60°
100%	90%	80%	71%	62%

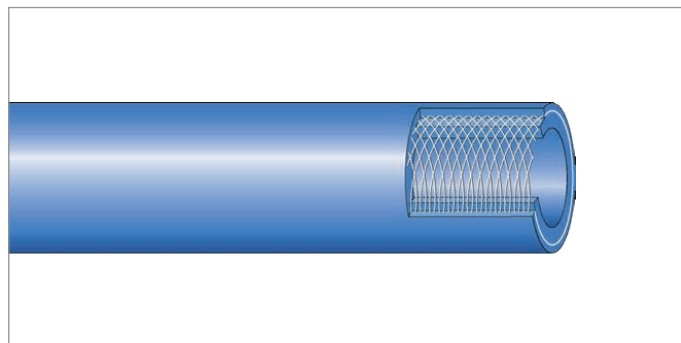

Code - C11958....

Base Material - PUR

Operating Temperature - -30 ÷ +60 °C

Pressure - 10 ÷ 16 bar

Vacuum - n.d.

Diameter Range - 6,5 ÷ 13 mm

Key Feature - Reinforced, Crush recoverable



inner Ø	outer Ø	working pressure	bursting pressure	coil length
mm	mm	bar	bar	m
6,5	10	16	64	100/50
8	12	16	64	100/50
9,5	13,5	12	48	100/50
11	16,0	12	48	100/50
13	18,0	10	40	50

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - mar_18 rbd