



Chemicals
Varnishes & Inks
Solvents



Antistatic
Conductive
Atex

A-FLUID EPDM SOLVENT

Properties


- hose cover resistant to splashing of corrosive chemicals.
- absence of silicone in tube walls.
- hose remains flexible within a wide temperature range.
- conductive tube, $R < 10^6 \Omega/m$.
- special paint hose couplings are recommended.

Applications

- pressure service line for ester, ketone, alcohol based paints, and numerous chemicals.

Construction

- inner tube: chemical resistant EPDM, black, smooth.
- reinforcement: synthetic textile.
- cover: chemical and weather resistant EPDM, green, smooth.

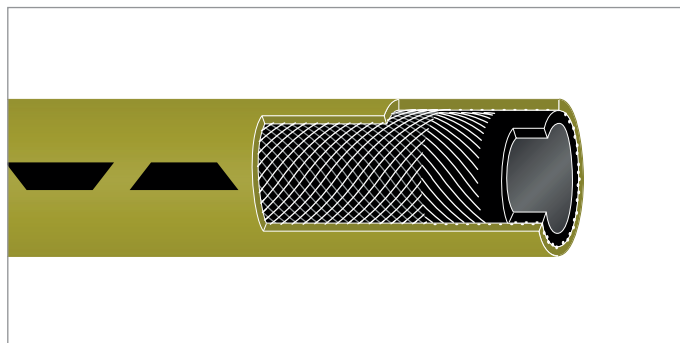

Code - C8G15....

Base Material - EPDM

Operating Temperature - $-30 \div +100$ °C

Pressure - 20 bar

Vacuum - n.d.

Diameter Range - $6 \div 25$ mm

Key Feature - Anti-static

inner Ø	wall thickness	outer Ø	working pressure	bursting pressure	bending radius	weight	coil length
mm	mm	mm	bar	bar	mm	kg/m	m
6	3,3	12,6	20	60	60	0,13	40/80/120
8	3,5	15,0	20	60	70	0,16	40/80/120
9	3,5	16,0	20	60	85	0,17	40/80/120
10	4,0	18,0	20	60	90	0,22	40/80/120
13	4,0	21,0	20	60	110	0,27	40/80/120
16	4,0	24,0	20	60	130	0,32	40/80
20	4,5	29,0	20	60	150	0,44	40/80
25	4,5	34,0	20	60	170	0,54	40/80

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - nov_17 rbd