



Foodstuffs
Pharmaceuticals
Cosmetics

A-FOOD SPIRIT

Properties


- ideal hose for breweries, winepresses, bottlers and many other installations in the brewing, beverage and spirits industry
- white lining is absolutely neutral to taste and odour, homogeneous, smooth and free of plasticizers
- suitable for pure alcohol up to 98%
- flexibility, pressure resistance and long service life even under extreme working conditions
- can easily be cleaned conventionally or by CIP installations
- can be steam cleaned up to +130 °C (max. 30 min.)

Applications

- ideal hose for the the brewing, beverage and spirits industry

Construction

- inner tube: CIIR white, non-porous and smooth, absolutely neutral to taste and odour
- reinforcement: synthetic fibres
** synthetic fibres with steel-wire helix
- cover: CR/SBR/NR, resistant to ozone, weather, UV and abrasion

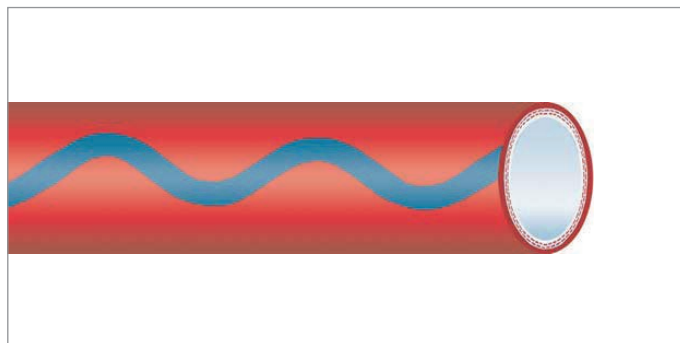

Code - F8G11....

Base Material - CIIR

Operating Temperature - up to +85 °C

Pressure - 16 bar

Vacuum - n.d.

Diameter Range - 13 ÷ 100 mm

**Key Feature - Reinforced, Food suitable,
alcohol up to 98%**

inner Ø	wall thickness	working pressure	bursting pressure	bending radius	weight	coil length
mm	mm	bar	bar	mm	kg/m	m
13	3,5	16	48	80	0,300	40
16	4,0	16	48	100	0,400	40
19	5,0	16	48	120	0,500	40
25	6,0	16	48	160	0,800	40
28	7,0	16	48	180	1,000	40
32	8,0	16	48	200	1,300	40

continued on next page



Foodstuffs
Pharmaceuticals
Cosmetics

A-FOOD SPIRIT

inner Ø	wall thickness	working pressure	bursting pressure	bending radius	weight	coil length
mm	mm	bar	bar	mm	kg/m	m
35	9,0	16	48	220	1,600	40
38	9,0	16	48	240	1,700	40
40	9,0	16	48	250	1,700	40
45	10,0	16	48	280	2,200	40
50	10,0	16	48	310	2,350	40
50 **	8,0	16	48	280	2,210	40
60	13,0	16	48	370	3,700	40
65	12,0	16	48	400	3,510	40
75	12,0	16	48	450	4,460	40
75 **	8,0	16	48	410	3,350	40
80	14,0	16	48	500	5,200	40
80 **	8,0	16	48	450	3,550	40
100	15,0	16	48	680	7,000	40
100 **	9,0	16	48	550	5,300	40

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - ott_17 rbd