



Foodstuffs
Pharmaceuticals
Cosmetics

A-FOOD EPDM WINE SP

Properties

- a smooth, seamless, white, multipurpose food grade tube that does not propagate bacterial growth
- collapsible: will recover its shape after accidental squeeze
- flexible and easy to handle
- excellent resistance to kinking
- changes in temperature have little effect due to the qualities of the rubber compound
- resistant to cleaning with detergents at temperatures up to +130 °C (during several minutes)
- non-marking, abrasion-resistant cover
- contains no phthalate

Applications


- suction and discharge of wine, beer and other liquid foodstuffs such as milk, cider, fruit juice and alcohol up to 96 %
- specifically designed for tank transfer in wineries, unloading bays, and for liquid foodstuff tankers

Construction

- inner tube: food grade EPDM, white, smooth
- reinforcement: synthetic textile with embedded PET helix.
- cover: weather resistant EPDM, wine-coloured, fabric impression

Standard/Approval

- EU regulations n° 1935/2004 and 2023/2006
- FDA regulation 21 CFR 177.2600

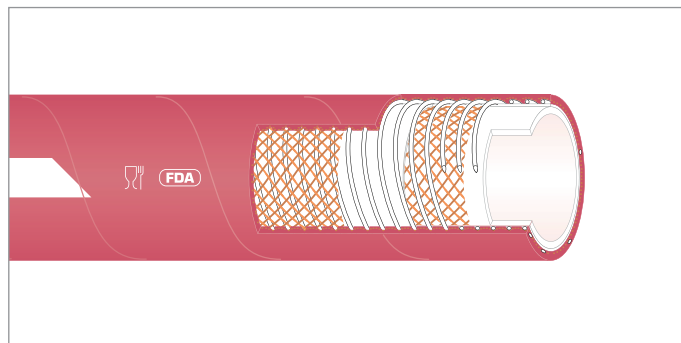

Code - F8G19....

Base Material - EPDM

Operating Temperature - -30 ÷ +100 °C

Pressure - 10 bar

Vacuum - 7,13 mtH2O

Diameter Range - 38 ÷ 75 mm

**Key Feature - Alcohol 96%, Food suitable,
Spiral Hose**

inner Ø	outer Ø	working pressure	bursting pressure	vacuum	bending radius	weight	coil length
mm	mm	bar	bar	mtH2O	mm	g/m	m
38	50	10	30	7,13	150	1,18	20/40
50	62	10	30	7,13	200	1,48	20/40
63	75,5	10	30	7,13	315	2,10	20/40
70	83	10	30	7,13	350	2,32	20/40
75	88	10	30	7,13	375	2,46	20/40

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - ott_17 rbd