



Foodstuffs
Pharmaceuticals
Cosmetics

A-FOOD PVC WINE

Properties


- suitable for suction and discharge
- smooth interior and exterior
- suitable for transporting class A, B, C & D1 foodstuffs as per norm EU 10/2011
- colours: transparent with red helix

Applications

- transport of wine and other alcoholic liquids (up to 50% proof)
- transport of non-fatty liquid foodstuffs

Construction

- polymer wall with rigid red PVC helix

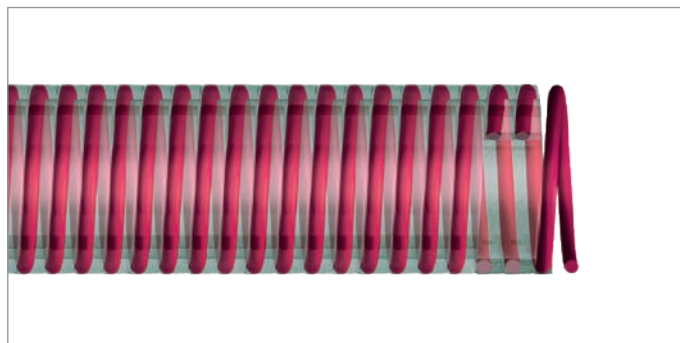

Code - F8P06....

Base Material - PVC


Operating Temperature - -15 ÷ +60 °C

Pressure - 4,0 ÷ 12,0 bar

Vacuum - 9,18 mtH2O

Diameter Range - 25 ÷ 120 mm

Key Feature - Food suitable, Spiral hose

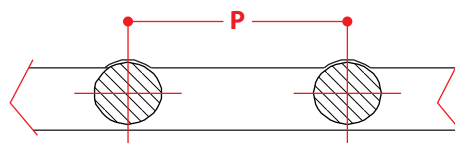

inner Ø	outer Ø	pitch P	working pressure	vacuum	bending radius	weight	coil length
mm	mm	mm	bar	mtH2O	mm	g/m	m
25	32	7,5	12,00	9,18	170	400	50
30	38	8,0	11,00	9,18	190	460	50
40	49	8,5	9,50	9,18	270	750	50
50	60	9,5	8,00	9,18	350	1040	50
60	71	10,0	7,50	9,18	415	1350	50
80	94	11,0	6,50	9,18	555	2100	50
100	116	13,0	5,00	9,18	695	3200	50
120	137	13,0	4,00	9,18	900	4000	30

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - ott_17 rbd