

TUBISO - DRILLED STRIP

Properties

- rubber strip punched longitudinally in order to make it more flexible
- elastic section for fitting around fluid and gas pipes
- cut in equal sections to the circumference of the isolated pipe it can be fitted between a metal collar and the pipe.

Applications

- Anti-vibration and protection support for installation of pipes




Code - R2TUB....

Material - Rubber

Hardness - 40 ÷ 65 °shore A

Code	Dimension					Load		Collar width	Strip lenght
	L	l	s	H	h	Normal Load	Subsidence		
	mm	mm	mm	mm	mm	daN/m	mm	mm	mt
R2TUB30	38	33	2.5	12	9	1000	1	30	25
R2TUB40	48	42	3	13	10	1600	1	40	25

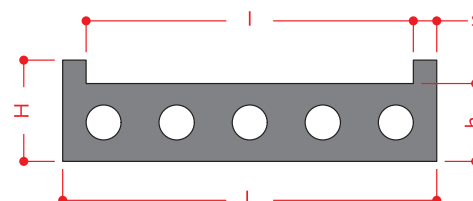

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • apr_19 rdb