

APAMA

Properties

- elastic mounts made from one or two rubber sections vulcanised to a metal cover fitted with a bolt for fixing to machinery
- adhesion to the ground is made by the weight of the machinery

Applications

- vibration-proof support of machines and equipment of all types




Code - S2APA0....

Material - Rubber/Metal


Hardness - 40 ÷ 65 °shore A

	ITEM	L	Normal Static Load	Subsidence (60 °shore A)
		mm	kg	mm
Type A	81350	50	250	2
	81351	100	500	2
	81352	150	750	2
	81353	200	1000	2
Type AA	81354	100	850	2
	81355	150	1300	2
	81356	200	1700	2

Type A

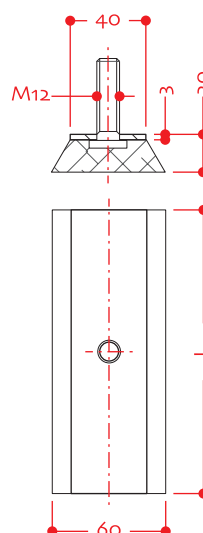

Type AA

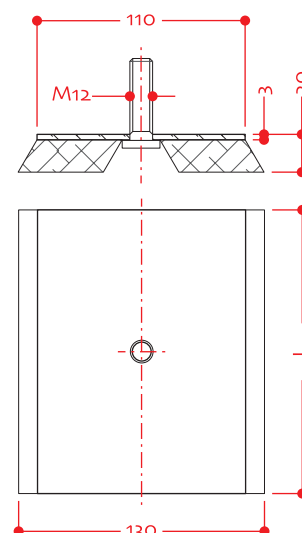

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • apr_19 rdb