

COMAF

Properties

- elastic mounts made from one or two rubber sections vulcanised to a metal cover fitted with a bolt for fixing to machinery and to one or two further lower metal plate provided with holes for anchoring to the ground
- for use in the presence of transverse dynamic forces or when the base surface is particularly smooth

Applications

- vibration-proof support of machines and equipment of all types




Code - S2COM0....

Material - Rubber/Metal


Hardness - 40 ÷ 65 °shore A

	ITEM	M	K	L	Normal Static Load	Subsidence (60 °shore A)
		mm	mm	mm	kg	mm
Type C	81357	115	85	50	250	2
	81358	165	135	100	500	2
	81359	215	185	150	750	2
	81360	265	235	200	1000	2
Type CC	81361	165	135	100	850	2
	81362	215	185	150	1300	2
	81363	265	235	200	1700	2

Type C

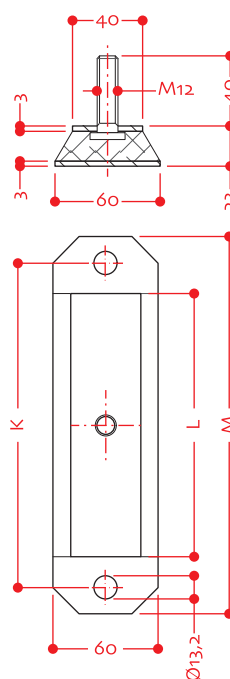

Type CC

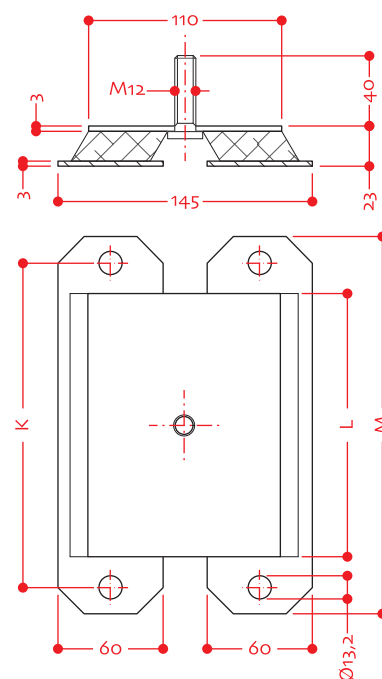

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • apr_19 rdb