

PUMAF

Properties

- anti-vibration mounts made from one or two trapezoidal shaped rubber sections that are pierced longitudinally in order to increase their flexibility.
- the rubber sections are vulcanised to a metal cover that has a bolt for anchoring to the machinery and to one or two metal base plates for fixing to the ground or another solid surface.

Applications

- machinery in general when is required a good static subsidence
- air-conditioning units
- motor pumps




Code - S2PUM0....

Material - Rubber/Metal


Hardness - 40 ÷ 65 °shore A

	ITEM	M	K	L	Normal Static Load	Subsidence (55 °shoreA)
		mm	mm	mm	kg	mm
Type P	81364	115	85	50	120	8
	81365	165	135	100	250	8
	81366	215	185	150	350	8
	81367	265	235	200	500	8
Type PP	81368	165	135	100	500	8
	81369	215	185	150	750	8
	81370	265	235	200	1000	8

Type P

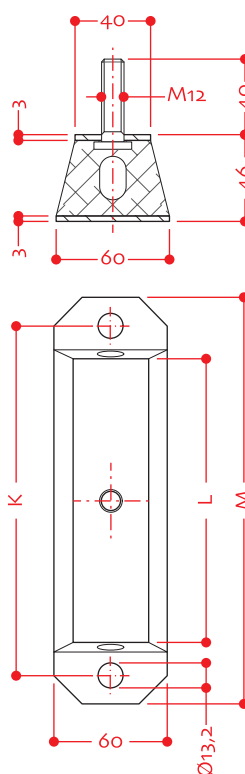

Type PP

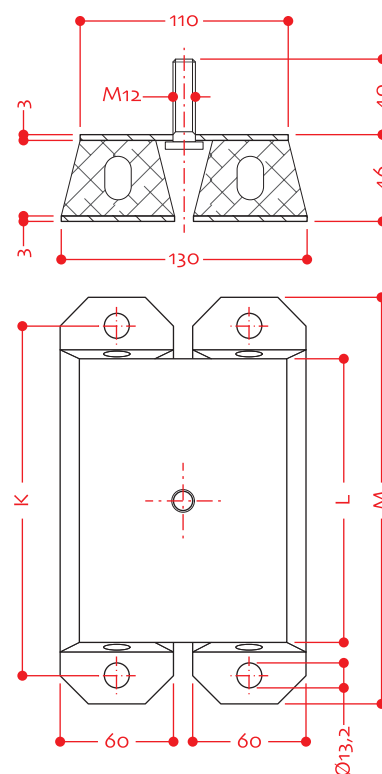

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • apr_19 rdb