

SUCOMA

Properties

- mount where the rubber is vulcanised over a metal dome which has a threaded hole for a securing bolt, and vulcanised onto a metal base plate or support flange that is pre-drilled for securing to the floor or other rigid surface

Applications

- vibration-proof support of machines and equipment of all types




Code - S2SUC....

Material - Rubber/Metal


Hardness - 40 ÷ 65 °shore A

ITEM	Type	L	H	K	ØC	ØA	ØE	ØD	ØF	ØB	S	Normal Static Load	Subsidence (60 °shore A)
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	daN	mm
82218	1	88	23	68	8,2	48	18	6,2	42	38	1,5	100	2,7
82217	1	100	30	85	10,2	62	25	8,2	55	50	2	200	3,8
82045	1	130	45	110	16,2	92	42	10,2	70	73,5	3	300	4,6
82195	1	190	50	160	24,2	119	60	16,2	100	98,5	5	600	6,2
88819/1	2	168	50	132	M16x2	119	60	13	--	98,5	5	600	6,0
81989	1	232	60	200	30,2	160	90	16,2	140	133	6	1200	4,4
89411/1	2	182	60	150	M20	160	91	13	--	133	6	1200	4,4
87412/1	3	180	50	150	24,2	108	--	16,2	100	83	6	800	1,0


Type 1

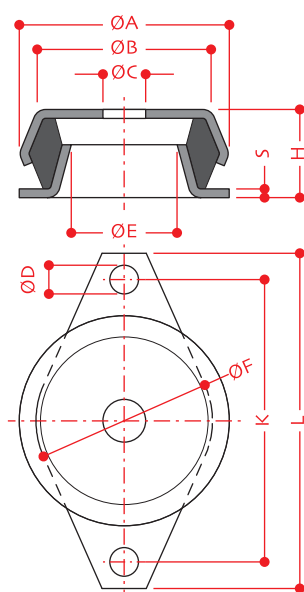

Type 2

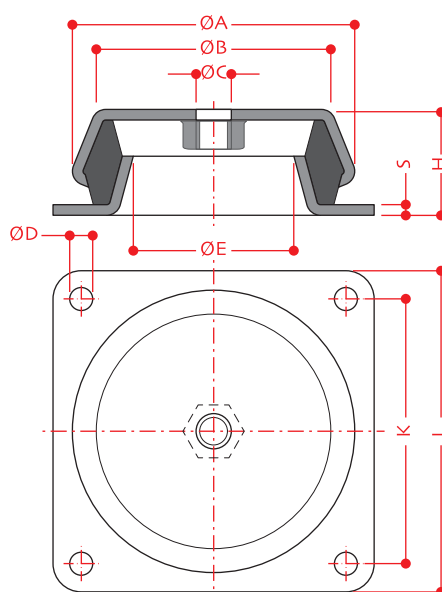

Type 3

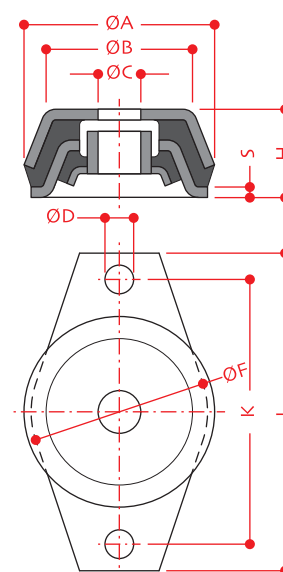

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • apr_19 rdb