



Sleeve  
**Neoprene**  
6/10 mm

**ATAG**  
SERVING INDUSTRY SINCE 1947




#### SCOPE

Life sciences (pharmaceutical industry, hospitals).

Polychloroprene glove. Very good resistance to sterilisation agents (hydrogen peroxide) and radiation sterilisation (Gamma and Beta rays). Self-extinguishing.

- ■ ■ Economical performance
- ■ ■ Chemical performance
- ■ ■ Mechanical performance
- ■ ■ Storage performance

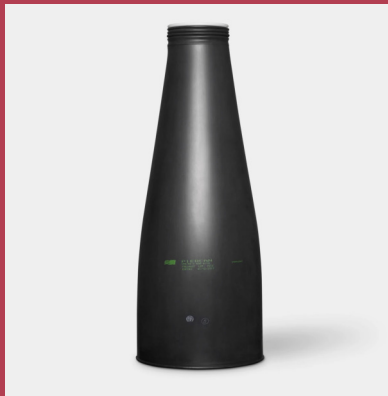

## GENERAL INFORMATION

Chemical composition	Polychloroprene
Material code	C
Colour	Black
Packaging	Individually packed in two-toned black and transparent, heat-sealed and easy-opening pouch. Pack of 10 units.
Care instructions	Store in the original packaging between +5°C and +25°C. Expiry date of 3 years in the original packaging. Wash with soapy water, rinse with clear water and then air-dry at a low temperature (<40°C).
Treatment	Non-recyclable. Disposal as simple non-toxic waste if not contaminated by a hazardous substance.
Sterilisation	Not available in decontaminated or decontaminated-sterile version.
Powdering	Standard: powder-free sleeve.
Disinfectants	Excellent resistance to the following disinfectants: 0.50% Hexanios G+R, 0.25% Surfanios, 0.50% Septanios, 100% Sopropor, 10% Sopropor, 70% Isopropyl alcohol.
Dimensional tolerances	Thickness: 6/10 mm (palm min 5/10, max 7/10). Length tolerance (+/- 20 mm). Diameter of the rim: 6 mm (+/-1 mm).

## PHYSICOCHEMICAL PROPERTIES TEMPERATURE RANGE: -20 TO +100°C

Alcohols	— — —
Acids, bases	— — —
Strong oxidants	— — —
Uv, ozone, free radicals, natural ageing	— — —
Ketone solvents	— — —
Chlorinated solvents	— — —
Aromatic solvents	— — —
Aliphatic oils and solvents	— — —
Peracetic acid sterilisation (3%)	— — —
H2O2 Sterilisation (35%)	— — —
H2O2 Sterilisation (50%)	— — —
25-50 kGray gamma radiation	— — —
Autoclave sterilisation (121°C)	— — —
Protection from ionising radiation	non

\* — — — Not recommended — — — Can be used under certain conditions — — — Acceptable — — — Recommended

## MECHANICAL PROPERTIES

100% Modulus <sup>(1)</sup>	Tensile strength <sup>(1)</sup>	Elongation at break <sup>(1)</sup>
< 2.0 MPa	> 15 MPa	> 500%

(1) (Iso 37 type 2)



The list of references is available on the website.

Per dimensioni, misure e prezzi  
contattare Ufficio Vendite ATAG

Regarding dimensions, length, prices  
contact ATAG's Sales Office



**ATAG**  
SERVING INDUSTRY SINCE 1947

