



Foodstuffs
Pharmaceuticals
Cosmetics

A-FOOD MILK

Properties


- premium quality milk and dairy hose for light suction and delivery of oily and fatty foodstuffs
- complying with FDA standards, with BgVV recommendations and requirements of the German food legislation, and with M.D. 21/03/73 and following amendments
- RAL registration for food quality
- suitable for all commercial cleaning and disinfection products used in the food industry
- sterilisation up to 130°C for a maximum time of 30 minutes

Applications

- oil mills, dairies and food processing industries in general

Construction

- inner liner: NBR-based rubber, light colour, smooth, odourless and tasteless, mirror-like
- reinforcement: synthetic fibres
- outer cover: CR-based rubber, blue, smooth, abrasion, ozone, weather and animal/vegetable fat resistant, cloth finish

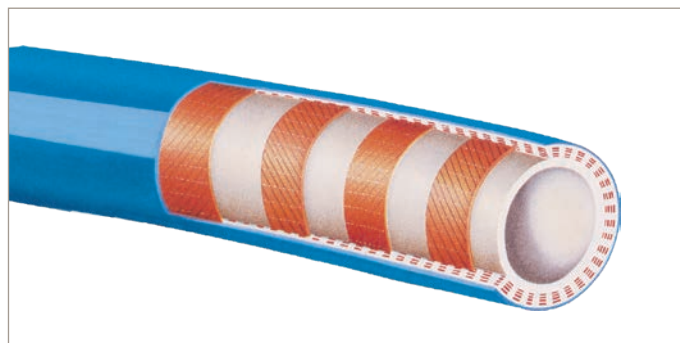

Code - F8G06....

Base Material - NBR

Operating Temperature - -20 ÷ +90 / peaks +130 °C

Pressure - 10 bar

Vacuum - 5,44 ÷ 8,16 mH₂O

Diameter Range - 13 ÷ 100 mm

Key feature - Reinforced, Food suitable, FDA

inner Ø	wall thickness	working pressure	vacuum	bending radius	weight	coil length
mm	mm	bar	mH ₂ O	mm	kg/m	m
13	5	10	8,16	80	0,350	40
19	5	10	6,80	120	0,470	40
25	5	10	6,80	150	0,770	40
32	8	10	8,16	200	1,420	40
35	9	10	8,16	210	1,770	40
38	9	10	8,16	230	1,930	40
40	10	10	8,16	240	2,400	40
45	10	10	8,16	270	2,690	40
50	10	10	6,80	300	2,790	40
52	11	10	6,80	310	3,190	40
60	12	10	6,80	420	3,890	40
65	12	10	5,44	460	4,160	40
70	14	10	5,44	500	5,350	40
75	15	10	5,44	530	5,950	40
80	15	10	5,44	560	6,180	40
100	16	10	5,44	700	8,160	40

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • ago_24 rdb