



Foodstuffs
Pharmaceuticals
Cosmetics

A-FOOD EPDM WINE

Properties

- smooth, seamless, white, multipurpose food grade tube that does not propagate bacterial growth
- flexible and easy to handle, especially in large diameters, for tank loading and transfer of grapes and transfer of marc
- changes in temperature have little effect due to the qualities of the rubber compound
- resistant to cleaning with detergents or steam (max. +130 °C during several minutes)
- non-marking cover with very good ageing and weather resistance
- contains no phthalate

Applications


- discharge of wine, beer and other liquid foodstuffs such as milk, cider, fruit juice and alcohol up to 96 %
- specifically designed for tank transfer in wineries, unloading bays, and for liquid foodstuff tankers

Construction

- inner tube: food grade, EPDM, white, smooth
- reinforcement: synthetic textile
- cover: weather resistant EPDM, wine-red, fabric impression

Standard/Approval

- EU regulations n° 1935/2004 and 2023/2006
- FDA regulation 21 CFR 177.2600

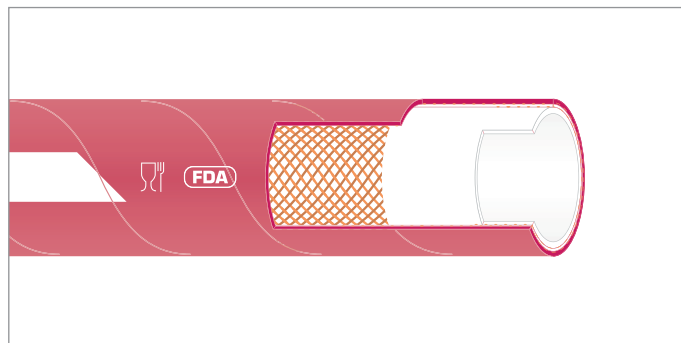

Code - F8G19...NS

Base Material - EPDM

Operating Temperature - -30 ÷ +100 °C

Pressure - 10 bar

Vacuum - n.d.

Diameter Range - 38 ÷ 150 mm

Key Feature - Alcohol 96%, Food suitable

inner Ø	outer Ø	working pressure	bursting pressure	weight	coil length
mm	mm	bar	bar	g/m	m
38	49	10	30	0,93	20/40
50	61,5	10	30	1,24	20/40
63	74,5	10	30	1,49	20/40
75	88	10	30	1,99	20/40
100	114	10	30	2,63	20
125	140	10	30	4,23	20
150	165	10	30	4,97	20

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications - ott_17 rbd