



Foodstuffs
Pharmaceuticals
Cosmetics



Non-aggressive liquids

A-FOOD PVC

Properties


- food-suitable according to 10/2011/UE (1935/2004/CE)
category A-B-C-E and according to LFGB
- smooth inside
- colours: transparent, ivory spiral

Applications

- suction/discharge of liquids, pulverized or grainshaped products, granulates, pellets
- only transport of non fatty liquid foodstuffs

Construction

- PVC semi-transparent, smooth, embedded PVC spiral, ivory

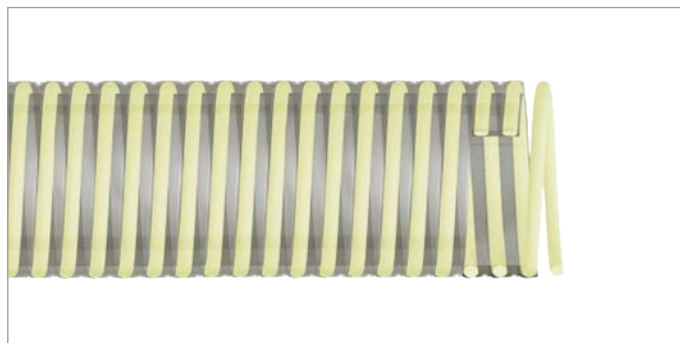

Code - F8P01....

Base Material - PVC


Operating Temperature - -15 ÷ +60 °C

Pressure - 1,50 ÷ 8,00 bar

Vacuum - 7,14 mtH2O

Diameter Range - 19 ÷ 203 mm

Key feature - Food-suitable, Spiral hose

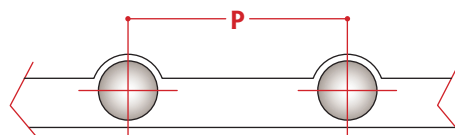

inner Ø	outer Ø	pitch P	working pressure	vacuum	bending radius	weight	coil length
mm	mm	mm	bar	mtH2O	mm	g/m	m
19	25	7,0	8,00	7,14	76	220	50
20	26	7,0	8,00	7,14	80	230	50
25	31	7,5	7,00	7,14	100	280	50
32	39	8,0	6,00	7,14	128	380	50
38	45	8,5	6,00	7,14	152	480	50
40	47	8,5	6,00	7,14	160	520	50
45	53	8,5	5,50	7,14	180	640	50
51	59	9,5	5,00	7,14	204	750	50
60	69	10,0	4,50	7,14	240	970	50
63	72	10,3	4,00	7,14	252	1000	50

continued on next page



Foodstuffs
Pharmaceuticals
Cosmetics



Non-aggressive liquids

A-FOOD PVC

inner Ø	outer Ø	pitch P	working pressure	vacuum	bending radius	weight	coil length
mm	mm	mm	bar	mtH2O	mm	g/m	m
65	74	10,5	4,00	7,14	260	1050	50
70	80	10,5	3,50	7,14	280	1150	50
76	86	11,0	3,50	7,14	304	1350	50
80	91	11,0	3,50	7,14	320	1520	50
90	102	12,0	3,00	7,14	360	1800	50
102	114	13,0	3,00	7,14	408	2200	50
110	123	13,0	3,00	7,14	440	2500	50
120	133	13,0	3,00	7,14	480	2800	30
127	141	15,0	3,00	7,14	508	3200	30
152	168	15,5	2,50	7,14	608	4350	30
203	222	20,0	1,50	7,14	812	6600	15

ATAG reserves the right to make changes without notice, by virtue of any quality improvements and/or product specifications • ott_17 rdb